# ARTFOX Brochure For Church

Website: http://www.artfox.net

Facebook : http://www.facebook.com/artfox.pro
Tel : +1-(323)287-5559 +1-(323)287-5858

WhatsApp: +86-13560458375
Email: sales@artfox.net

Los Angeles: 733 9th Ave, City of Industry, CA91745

Dallas : 3125 N Great SW Pkwy #200, Grand Prairie, TX 75050

New Jersey: 70 Carter Dr Edison NJ 08817

Chicago: 4222 S Pulaski Rd Unit A Chicago, IL 60632

### **Smart Pro P3.91/P2.976**

19.7"x39.4" (500x1000mm) 30lbs(13.8kg) Suitable for P2.976, P3.91,P4.81,P5.95 indoor/outdoor

	Pixel Pitch	Pixels	LED Type	Scan Way	Brightness
Indoor	P2. 976	168x336	SMD2121	1/28	≥1300 Nit
	P3. 91	128x256	SMD2121	1/16	≥1400 Nit
	P4.81	104x208	SMD2121	1/13	≥1500 Ni
Outdoor	P3. 91	128x256	SMD1921	1/16	≥6000 Ni
	P4.81	104x208	SMD2727	1/13	≥6000 Ni
	P5. 95	84x168	SMD3535	1/7	≥6500 Ni

≥3,840Hz Refresh rate/60h Frame Rate Auto free voltage 100v-240v Power Supply 16 bit Gray Level Neutrick PowerCon in/out Ethercon in/out





### XPO P1.875/P2/P2.5/P4

25.2"x18.9" (640x480mm) I5bs(7kg)
4:3 Ratio
Suitable for P2/P2.5/P4 fixed installed on wall
Can hang on the truss or put on the floor too
front maintenance

Pixel Pitch	Pixels	LED Type	Scan Way	Brightness
P2	320x240	SMD1515	1/32	1200 Nit
P2. 5	256x192	SMD1515	1/16	≥1200 Nit
P4	160x120	SMD2121	1/16	≥1200 Nit





≥3,840Hz Refresh rate/60h Frame Rate Auto free voltage 100v-240v Power Supply 16 bit Gray Level

# LED Poster P1.9/P2.5 - Cloud Screen

controlled: mobile phone application, computer, Wi-Fi, USB connection,

4G, Cloud

Size: 74.89"x22.52"x1.38" (1902x572x35mm)

Weight: 71lbs (32kg)

Pixel Pitch	Pixels	LED Type	Scan Way	Brightness
P1. 9	972x288	SMD1010	1/27	1400 Nit
P2. 5	756x224	SMD2121	1/28	≥1400 Nit

≥2,880 Hz Refresh rate/60h Frame Rate 1400 nit brightness Auto free voltage 100v-240v Power Supply 16 bit Gray Level



Front Service

23.6"x13.3" (600x337.5mm) 11lbs(5kg)
16:9 Ratio
Suitable for P1.25/P1.56/P1.667/P1.875 fixed installed on wall
Can hanging on the truss or put on the floor too

Pixel Pitch	Pixels	LED Type	Scan Way	Brightness
P1. 25	480x270	SMD1010	1/30	≥1000 Nit
P1. 56	384x216	SMD1010	1/32	≥1000 Nit
P1. 667	360x202	SMD1515	1/32	≥1000 Nit
P1. 875	320x180	SMD1515	1/30	≥1000 Nit

≥3,840Hz Refresh rate/60h Frame Rate Auto free voltage 100v-240v Power Supply 16 bit Gray Level Hub Design





# **Hybrid LED 250W**

250W White LED lamp

13300 Lux equally light spot @ 5m, 5.5° Beam Angle 950 Lux equally light spot @ 5m, 30° Beam Angle

Beam Angle: Linear Zoom 5.5-30° Color Wheel: 7 colors +Open

Two Gobo Wheels: 8 fixed gobos +Open,

7 Rotating Gobos + Open
Prism: 8-facet Circular Prisms

LED Linear Dimming Linear Frost

16/18 DMX Channels

Weight: 29.7lbs (13.5kg) Size: 12.6"x8.7"x18.9"

(320x220x480mm)

#### Features:

Very easy to replace Gobo, Beam Spot Wash Hybrid.



# Sky Beam 9R

YODN R9 260w lamp, Super Bright 741,000 LUX @ 5m, 2° beam angle, 5 prisms, 11 prisms effects

Rainbow effects

Frost

**Linear Dimming** 

13 fixed gobos (8 fixed gobos + 5 dynamic gobos) + Open

13 colors + Open Touch screen PowerCon in/out

Prims: Total two prism wheels, 5 prisms.

First wheel: 8 facet circular prism, 6 facet Linear prism, Frost. Second wheel: 16 facet circular prism, 6+12 Honeycomb prism,

4+8+8 Honeycomb prism. Channel mode: 18 chs

Pan scan: 540° (16bit) Tilt scan: 270° (16bit)

Voltage: 100-240V, 50/60Hz

power: 375W IP Rate :IP20 Rate

36 lbs (15.5kg) / 12.2" x 9.5" x 22.8(310x240x580mm)



5 Prisms, 11 Prisms effects, Rainbow effects, dynamic Gobo, Super bright

### **Beam Wash 19E**

19x15W RGBW Quad Osram LEDs 50,000hrs 9,500 Lumens Output

Beam Wash 2-in-1

Optimized Lens Design, never leak light, 3 circles sections Individual control

Flicker free Operation for Broadcast TV and FILM, over 400hz Broad color palette, RGBW color mixing

7-50 degrees motorized zoom / Electronic Dimming: 0%-100%

16 bit Dimming curve, 0-25 times/sec Strobe 3 DMX Channel Modes (12/21/27 chs)

540°Pan /270°Tilt, 8/16 bit movement

3pin & 5pin DMX in/out , PowerCon in/out

Master/Slave, DMX, Sound Active, Auto-run

320W Max Power Consumption/ 100-240V,50/60Hz / CE, Rosh

approved

26lbs / 13" x 10.16" x 15.75"

#### **Keywords:**

Beam, Wash, Zoom, Fast, Quiet, Excellent Optics



### Solar Wash X

19x40W, Osram, 4 in 1 moving head with pixel mapping and zoom

6 degree narrow Beam and 49 degree large bright wash

Motorized Zoom (6° - 49°)

Pan: 540° Tilt: 270°

Linear Color Temperature Presets

RGBW Color Mixing and Pixel Control

Color Presets and Macros

Electronic Strobe and Variable Dimming Curves

16-bit Dimming

DMX, RDM, Protocol Support

Folder Clamps

#### **Key Words:**

Beam Wash, 19x40W, Quad-color, Zoom 6-49 degrees

### Solar Wash M

Osram 4 in 1, 40w LED, moving head wash with pixel mapping and zoom

Beam-wash, 2 in 1. very narrow beam and high brightness wash

Motorized Zoom (6° - 49°)

Linear Color Temperature Presets

RGBW Color Mixing and Pixel Control

Color Presets and Macros

Electronic Strobe and Variable Dimming Curves

16-bit Dimming

Folder Clamps

### **Key Words:**

Beam Wash 2-in-1, 12x40w RGBW, Pixel Tech





### **Aurora Pendant COB**

Full color 200W 4in1 COB

2,800 - 9,000K Color Temperature

High CRI

No fans, convection cooled/Silent Operation

50,000-100,000 Hour Average Life\*

Strobe and Color Macros

Variable 16-bit Dimming Curve Modes

High-Speed Electronic Shutter and Strobe

Built-ed In Wireless DMX

4 Button Control Panel and LCD Menu Display

Length: 21.5" (547 mm) Width: 6.89" (175 mm)

Weight: 13.4 lbs.



#### **Key Words:**

200W COB RGBW 4-in-1, 2,800 - 9,000K Color Temperature

### **Aurora Pendant FC**

2 kinds of dimming curved, 32 bit smoothly dimming replaceable lens from the front, 40 ,60 degree for optional.

40° Beam Angle - 60° Field Angle

Strobe and Color Macros

Selectable Dimming Curves

4 DMX Channel Modes (4/5/7/9)

Built-ed In Wireless DMX

Electronic Strobe and Variable Dimming Curves

16-bit Dimming

Folder Clamps



### **Key Words:**

36x3W RGBW 4-in-1

### **Aurora Fresnel VW**

LED Chip 350W, Warm white/ cool white, 2 in 1 (2,800K to 6,500K)

Motorized zoom: 15 -57 degree.

16-bit dimming of master dimmer and individual colors

Virtual Color wheel with color matched to popular gel colors

RDM for added flexibilityNo flickering on camera

High CRI over 96

**Electronic Strobe** 

Over 50,000 hours lifespan.

Length: 29.5" (525mm) (@ Lens 26 degree)

Weight: 27lbs

Housing: Die-cast Aluminum, IHNC Fans Cooling



### **Key Words:**

350w warm cool white 2 in 1, Motorized zoom, CRI>96

### **Aurora Profile FC**

Osram Chip 280W,6 in 1, Full color

(Red, Green, Blue, white, Amber, lime-green)

Electronic Strobe

Dimming (0-100%), Variable Dimming Curve Modes

Flicker-Free

4 Button Touch screen

LED Menu Display

5pin and 3-pin DMX In/Out

Ultra-smooth 16-bit dimming

Weight: 27lbs (12.3kg)

Housing: Die-cast Aluminum, IHNC Fans Cooling

#### **Key Words:**

280W RGBWA-L 6-in-1, CTO 3200-6500K



### LED HD Profile /Leko 300W

Light Source: Citizen LED 300w/200w COB 3200k or 5600K color

Temprature optional

High CRI >93. over 11,450 Lumens @ full

Very Flexiable to cut light

Interchangeable Lens Options, Beam angle, 19°/26°/36°/50°

for option

Dimming, Strobe, beam angle adjustable High-grade Strong Anti-fire ABS housing IHNC Fans Cooling, IP20

RDM LCD Screen

18.7lbs, 26.9"x9.2"x12.6"



### **LED HD Fresnel**

Light Source: Citizen LED 200w COB 3200k or 5600K color Temprature optional 0-100% linearly Dimming, Zoom 23°-53° Die-casting housing, IP20 17.4lbs, 17.7"x10.3"x7.9"



# Battery Wireless outdoor Par 12/6

12x15W, 6x15W 6-in1 RGBWA-UV LEDs

battery powered and wireless.

Battery Powered: (On full charge, 6 hours with all LEDs on,

10 hours on auto mode)

Wireless DMX: Built-in 2.4Ghz 7 Channels, 1000 fts/300m works Remote Control: 100 fts/30m works, Control led diming, strobe, flash and so on WiFI control, Remote Control, Wireless DMX

IP65 outdoor

Rechargeable flight case

Size: par12: 11.4"x11.4"x7.5" (290\*290\*190mm)

Weight: 13.2lbs (6kg)

Par6: 7.9"x7.9"x5.9" ( 200\*200\*150mm )

Weight: 2.5kg = 6lbs

Keywords:

IP65 outdoor, Battery, Wireless, RGBWA-UV 6-in-1 Remote control





### Flat Par 9 Wireless

9x15W RGBWA-UV 6-in-1
Battery powered, on full charge, it can last 6-10 hours
Wireless DMX
Remote Control
Rechargeable flight case
(Wifi Built-In, App control optional)
9800 lux @ 1m beam angle: 15/25/45°optional
100-240v AC,50-60Hz (auto-ranging)
3-pin DMX input and output connectors
7.71lbs. 8.25' 'x3.751' 'x3.75' 'IP20,indoor/day location

### **Keywords:**

Battery powered, wireless, Remote control



### **Strong Par 18**

18x15W RGBWA-UV 6 colors in one 15,000 Lux @ 1m, 3,500 Lux @ 2m (full white) Beam angle: 25,35,45,60 degree lens optional IP65, indoor/dry location 90-240v AC,50-60Hz (auto-ranging) 3/5-pin DMX Input/Output Connector 13.2lbs. 9"x13.8"x11"

#### Keywords:

bright, excellent color mixing, smooth dimming, IP65 outdoor



### **Shine Bar 18Q**

LED source: 18x15w RGBWA-UV, 18x10w RGBW 4-in-1 Osram LEDs, over 50,000 hours lifespan

Beam angel: 25 degree, (15, 45 degree for option)

Power consumption: 180W Voltage: AC90V-240V/50-60Hz

Control: DMX512, Master-slave, stand-alone, Sound active

Channel: 2, 5, 7, 10, 22 Channels

Effect: Dimming, strobe, gradual change, any color mixing Cooling way: Die-cast aluminum body, Natural convection

IP rate; IP65


Dimension: 1000\*92\*163mm)

Weight: 17.6 lbs (8kg)



#### Keywords:

IP65 outdoor, Pixel Tech

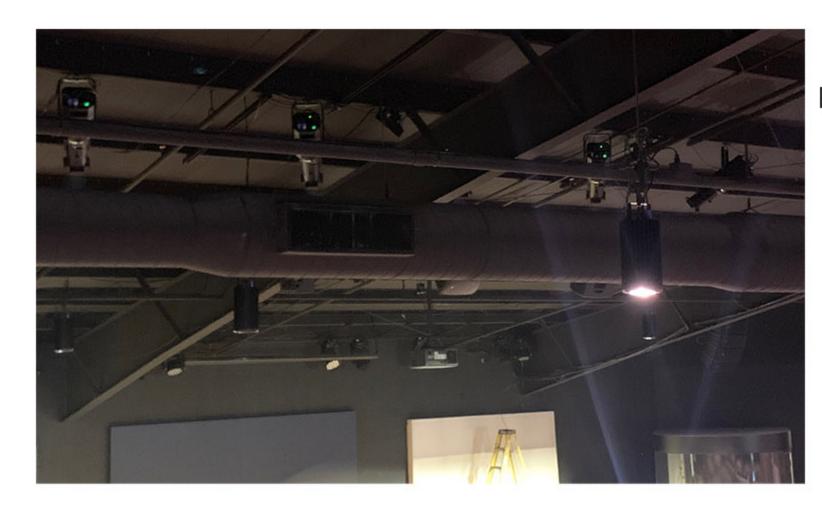

Products:

Leko 300w Aurora Pendant FC



Products:

Beam Wash 19E Vista 17R



Products:

Hybrid 250w Beam wash 19E



Products:

Beam Wash 19E Vista 17R



Products:

Sky Beam 7R
Beam Wash 19E
LED HD Profile
P3.91 indoor



Products:

P3.91 indoor



Products:


Rose par 18 Vista 17R





Products:

P3.91 indoor Curved Solar Wash X Sky Beam 9R Aurora Profile WW

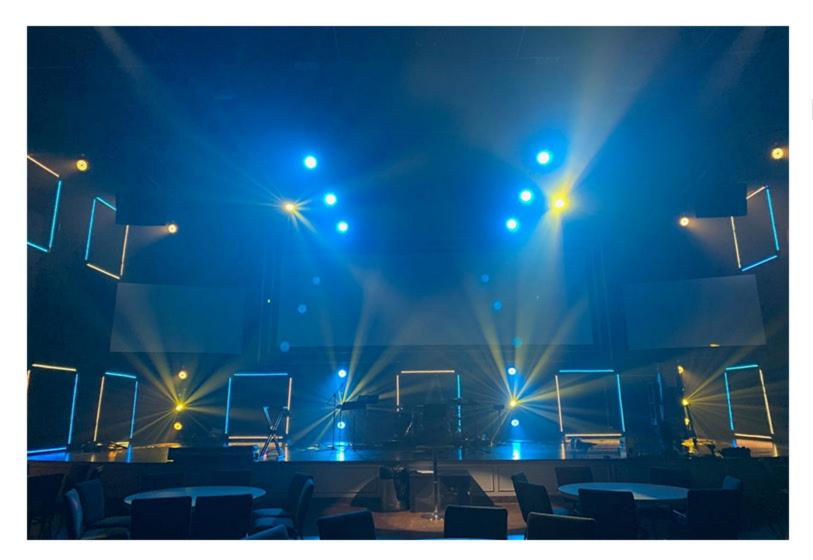


Products:

Rose par 18 Vista 17R



Products:

Sky Beam 9R
Beam Wash19E
Par 9 Wireless
P3.91 indoor
Dargon Spot

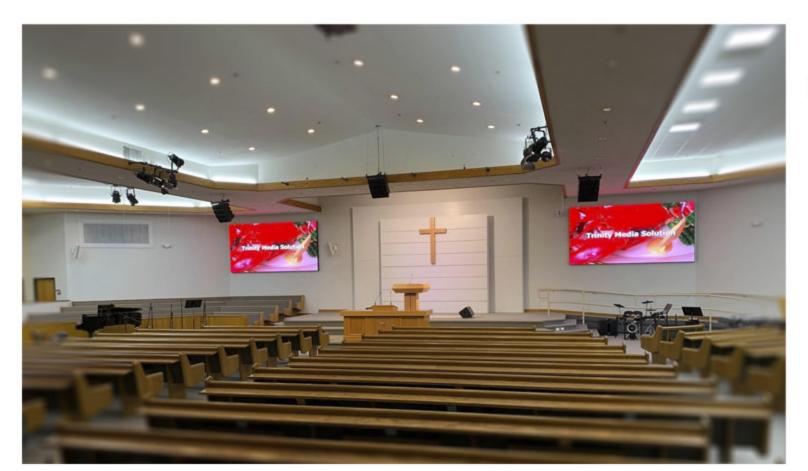

Products:

Xpo P2.5 LED HD Profile Aurora Fresnel VW



Products:

P3.91 indoor