


# Magic 3D

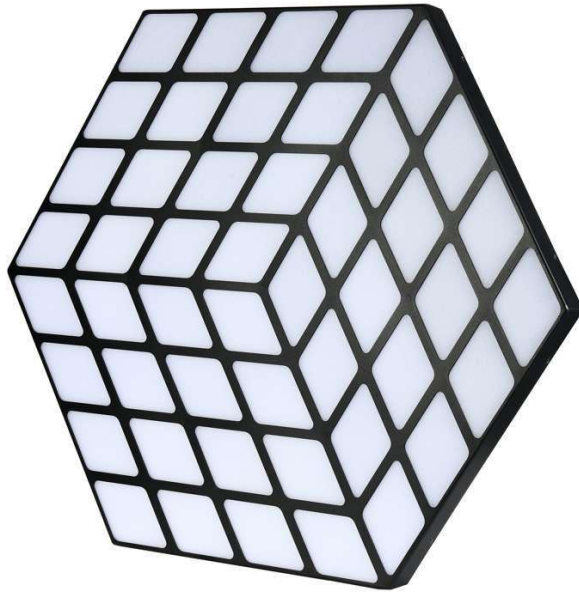

Please read through this manual before using this lamp

## Product specifications and parameters:

**Input voltage: AC90-240V 50/60Hz**


**Light Sources: 192Pcs\*0.5WSMD 5050 3in1 LED**

**Power consumption: 60W**

**Size:680cm\*590cm\*150cm**

**N.W:7.35kg G.W:9.4kg**

### 1.Graphic part:

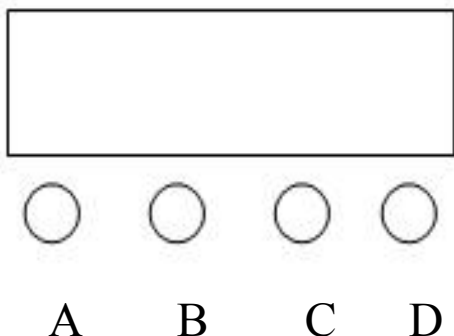

- A. function key
- B. additional key
- C. Subtract key
- D. Confirmation key

Operation description: press function key A will loop out different functions, press B or C key can modify its parameter value. Press D key to confirm.

**2.** LED display window function comparison table (all functions are selected and then press D key to confirm)

NO	show	function declaration
1	CH5/CH8/CH41/C144/C149	5 channel mode selection
2	d001	Channel address code 001-512) Add and subtract address code value of BCO C key
3	r255	switch to this state, you can adjust the brightness of the red light, and press the BCC key to adjust the brightness of the red light r001-r255)
4	G255	Under this condition, the brightness of green light can be adjusted, and the brightness of green light can be adjusted by pressing the B C key. (G001-G255)
5	b255	switch to this state, you can adjust the brightness of the blue light, and press the BCC key to adjust the brightness of the blue light b001-b255)
6	Pr01	switch to this function state, press BU C to select 31 built-in programs
7	SP01	To switch to this feature state, press the BCC key to adjust the speed of the

		built-in program. SP01-SP16)
8	AUTO/AUDI	Test mode, press BCkey to be able to self-walk harmonics
9	EP00/EP01	The DMX512 drop signal remains selected,
10	DISP	Digital tube inverted display settings.

### 3. DMX512Channel description

#### 5channel pattern

NO	function	Description
1	Total dimming	Red, green, blue total dimmer( 0-255) linear dimming, from dark to bright
2	stroboflash	(0-255) from slow to fast
3	Red dimming	Red dimmer( 0-255) linear dimming, from dark to bright
4	Green dimming	Green dimmer 0-255) linear dimming, from dark to bright
5	Blue dimming	Blue dimmer 0-255) linear dimming, from dark to bright

#### 8channel pattern

NO	function	Description
1	Total dimming	Red, green, blue total dimmer 0-255) linear dimming, from dark to bright.
2	stroboflash	(0-255)From slow to fast
3	Red dimming	Red dimmer 0-255) linear dimming, from dark to bright
4	Green dimming	Green dimmer 0-255) linear dimming, from dark to bright
5	Blue dimming	Blue light modulation, (0-255) linear dimming from dark to bright
6	colour mixture	A combination of colors.
7	kromprogramo	The first 6 channels enable 0-10 / 11-255) built-in programs.
8	Built-in program speed	0-255 up speed slow down 0 fastest speed.

#### 41channel pattern

NO	function	Description
1	Total dimming	Red, green, blue total dimmer 0-255) linear dimming, from dark to bright.
2	stroboflash	From slow to fast
3	The first group of lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
4	The first group of lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
5	first set of lamp dimming	Blue dimmer 0-255) linear dimming, from dark to bright
6	Second group of lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
7	Second group of	Green dimmer 0-255) linear dimming, from dark to

	lights dimming	bright
8	Second group of lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
9	Group 3 dimming	Red dimmer 0-255) linear dimming, from dark to bright
10	Group 3 dimming	Green dimmer 0-255) linear dimming, from dark to bright
11	Group 3 dimming	Blue dimmer 0-255) linear dimming, from dark to bright
12	4th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
13	4th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
14	4th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
15	5th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
16	5th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
17	5th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
18	6th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
19	6th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
20	6th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
21	7th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
22	7th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
23	7th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
24	8th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
25	8th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
26	8th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
27	9th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
28	9th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
29	9th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
30	10th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
31	10th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
32	10th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
33	11th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
34	11th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright

35	11th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
36	12th group lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
37	12th group lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
38	12th group lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
39	colour mixture	A combination of colors.
40	kromprogramo	The first 39 channels enable 0-10 / 11-255) built-in programs.
41	Built-in program speed	0-255 up speed slow down 0 fastest speed.

### Four lanterns were divided into 12 groups

### 144channel pattern

NO	function	explain
1	First light dimming	Red dimmer 0-255) linear dimming, from dark to bright
2	First light dimming	Green dimmer 0-255) linear dimming, from dark to bright
3	First light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
4	Second dimming	Red dimmer 0-255) linear dimming, from dark to bright
5	Second dimming	Green dimmer 0-255) linear dimming, from dark to bright
6	Second dimming	Blue dimmer 0-255) linear dimming, from dark to bright
7	Third dimming	Red dimmer 0-255) linear dimming, from dark to bright
8	Third dimming	Green dimmer 0-255) linear dimming, from dark to bright
	Third dimming	Blue dimmer 0-255) linear dimming, from dark to bright
10	Fourth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
11	Fourth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
12	Fourth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
13	Fifth dimming	Red dimmer 0-255) linear dimming, from dark to bright
14	Fifth dimming	Green dimmer 0-255) linear dimming, from dark to bright
15	Fifth dimming	Blue dimmer 0-255) linear dimming, from dark to bright
16	Sixth dimming	Red dimmer 0-255) linear dimming, from dark to bright
17	Sixth dimming	Green dimmer 0-255) linear dimming, from dark to bright
18	Sixth dimming	Blue dimmer 0-255) linear dimming, from dark to bright
19	Seventh light dimming	Red dimmer 0-255) linear dimming, from dark to bright
20	Seventh light dimming	Green dimmer 0-255) linear dimming, from dark to bright
21	Seventh light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
22	Eighth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
23	Eighth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
24	Eighth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
25	Ninth dimming	Red dimmer 0-255) linear dimming, from dark to bright

26	Ninth dimming	Green dimmer 0-255) linear dimming, from dark to bright
27	Ninth dimming	Blue dimmer 0-255) linear dimming, from dark to bright
28	Tenth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
29	Tenth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
30	Tenth light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
31	11th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
32	11th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
33	11th lights dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
34	Twelfth lights are dimmed	Red dimmer 0-255) linear dimming, from dark to bright
35	Twelfth lights are dimmed	Green dimmer 0-255) linear dimming, from dark to bright
36	Twelfth lights are dimmed	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
37	Thirteenth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
38	Thirteenth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
39	Thirteenth light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
40	14th light dimming	Red dimmer 0-255) linear dimming, from dark to bright
41	14th light dimming	Green dimmer 0-255) linear dimming, from dark to bright
42	14th light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
43	15th light dimming	Red dimmer 0-255) linear dimming, from dark to bright
44	15th light dimming	Green dimmer 0-255) linear dimming, from dark to bright
45	15th light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
46	Sixteenth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
47	Sixteenth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
48	Sixteenth light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
49	Seventeenth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
50	Seventeenth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
51	Seventeenth light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
52	Eighteenth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
53	Eighteenth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
54	Eighteenth light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright

55	19th light dimming	Red dimmer 0-255) linear dimming, from dark to bright
56	19th light dimming	Green dimmer 0-255) linear dimming, from dark to bright
57	19th light dimming	Green dimmer 0-255) linear dimming, from dark to bright
58	Twentieth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
59	Twentieth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
60	Twentieth light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
61	The twentieth light dimmer	Red dimmer 0-255) linear dimming, from dark to bright
62	The twentieth light dimmer	Green dimmer 0-255) linear dimming, from dark to bright
63	The twentieth light dimmer	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
64	Twenty-two lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
65	Twenty-two lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
66	Twenty-two lights dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
67	Twenty-third lights are dimmed	Red dimmer 0-255) linear dimming, from dark to bright
68	Twenty-third lights are dimmed	Green dimmer 0-255) linear dimming, from dark to bright
69	Twenty-third lights are dimmed	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
70	Twenty-four lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
71	Twenty-four lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
72	Twenty-four lights dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
73	Twenty - five lamp dimming	Red dimmer 0-255) linear dimming, from dark to bright
74	Twenty - five lamp dimming	Green dimmer 0-255) linear dimming, from dark to bright
75	Twenty - five lamp dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
76	Twenty-sixth lights are dimmed	Red dimmer 0-255) linear dimming, from dark to bright
77	Twenty-sixth lights are dimmed	Green dimmer 0-255) linear dimming, from dark to bright
78	Twenty-sixth lights are dimmed	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
79	Twenty-sixth lights are dimmed	Red dimmer 0-255) linear dimming, from dark to bright
80	Twenty-seventh light dimming	Green dimmer 0-255) linear dimming, from dark to bright

81	Twenty-seventh light dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
82	Twenty-eighth dimming	Red dimmer 0-255) linear dimming, from dark to bright
83	Twenty-eighth dimming	Green dimmer 0-255) linear dimming, from dark to bright
84	Twenty-eighth dimming	Blue light dimming , ( 0 - 255 ) linear dimming , from dark to bright
85	Twenty-ninth dimming	Red dimmer 0-255) linear dimming, from dark to bright
86	Twenty-ninth dimming	Green dimmer 0-255) linear dimming, from dark to bright
87	Twenty-ninth dimming	Blue dimmer 0-255) linear dimming, from dark to bright
88	Thirtieth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
89	Thirtieth light dimming	Green light, (0-255) linear dimming from dark to light
90	Thirtieth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
91	31th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
92	31th lights dimming	Green light, (0-255) linear dimming from dark to light
93	31th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
94	Thirty-two lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
95	Thirty-two lights dimming	Green light, (0-255) linear dimming from dark to light
96	Thirty-two lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
97	The thirty-third light dimmer	Red dimmer 0-255) linear dimming, from dark to bright
98	The thirty-third light dimmer	Green light, (0-255) linear dimming from dark to light
99	The thirty-third light dimmer	The thirty-third light dimmer
100	Thirty-four lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
101	Thirty-four lights dimming	Green light, (0-255) linear dimming from dark to light
102	Thirty-four lights dimming	Thirty-four lights dimming
103	Thirty-five lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
104	Thirty-five lights dimming	Green light, (0-255) linear dimming from dark to light
105	Thirty-five lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
106	Thirty-sixth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
107	Thirty-sixth light dimming	Green light, (0-255) linear dimming from dark to light



108	Thirty-sixth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
109	Thirty - seven lamp dimming	Red dimmer 0-255) linear dimming, from dark to bright
110	Thirty - seven lamp dimming	Green light, (0-255) linear dimming from dark to light
111	Thirty - seven lamp dimming	Blue dimmer 0-255) linear dimming, from dark to bright
112	38th light dimming	Red dimmer 0-255) linear dimming, from dark to bright
113	38th light dimming	Green light, (0-255) linear dimming from dark to light
114	38th light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
115	Thirty - nine lamp dimming	Red dimmer 0-255) linear dimming, from dark to bright
116	Thirty - nine lamp dimming	Green light, (0-255) linear dimming from dark to light
117	Thirty - nine lamp dimming	Blue dimmer 0-255) linear dimming, from dark to bright
118	The fortieth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
119	The fortieth light dimming	Green light, (0-255) linear dimming from dark to light
120	The fortieth light dimming	The fortieth light dimming
121	41th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
122	41th lights dimming	Green light, (0-255) linear dimming from dark to light
123	41th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
124	42th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
125	42th lights dimming	Green light, (0-255) linear dimming from dark to light
126	42th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
127	43th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
128	43th lights dimming	Green light, (0-255) linear dimming from dark to light
129	43th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
130	44th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
131	44th lights dimming	Green light, (0-255) linear dimming from dark to light
132	44th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
133	The forty-fifth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
134	The forty-fifth light dimming	Green light, (0-255) linear dimming from dark to light
135	The forty-fifth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
136	46th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
137	46th lights dimming	Green light, (0-255) linear dimming from dark to light
138	46th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
139	46th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
140	47th lights dimming	Green light, (0-255) linear dimming from dark to light
141	47th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
142	48th light dimmer	Red dimmer 0-255) linear dimming, from dark to bright
143	48th light dimmer	Green light, (0-255) linear dimming from dark to light
144	48th light dimmer	Blue dimmer 0-255) linear dimming, from dark to bright

## 149 channel mode

NO	function	explain
1	Total dimming	Red, green, blue total dimmer 0-255) linear dimming, from dark to bright
2	stroboflash	From slow to fast
3	First light dimming	Red dimmer 0-255) linear dimming, from dark to bright
4	First light dimming	Green light, (0-255) linear dimming from dark to light
5	First light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
6	Second dimming	Red dimmer 0-255) linear dimming, from dark to bright
7	Second dimming	Green light, (0-255) linear dimming from dark to light
8	Second dimming	Blue dimmer 0-255) linear dimming, from dark to bright
9	Third lights are dimmed	Red dimmer 0-255) linear dimming, from dark to bright
10	Third lights are dimmed	Green light, (0-255) linear dimming from dark to light
11	Third lights are dimmed	Blue dimmer 0-255) linear dimming, from dark to bright
12	Fourth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
13	Fourth light dimming	Green light, (0-255) linear dimming from dark to light
14	Fourth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
15	Fifth dimming	Red dimmer 0-255) linear dimming, from dark to bright
16	Fifth dimming	Green light, (0-255) linear dimming from dark to light
17	Fifth dimming	Blue dimmer 0-255) linear dimming, from dark to bright
18	Sixth dimming	Red dimmer 0-255) linear dimming, from dark to bright
19	Sixth dimming	Green light, (0-255) linear dimming from dark to light
20	Sixth dimming	Blue dimmer 0-255) linear dimming, from dark to bright
21	Seventh light dimming	Red dimmer 0-255) linear dimming, from dark to bright
22	Seventh light dimming	Green light, (0-255) linear dimming from dark to light
23	Seventh light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
24	Eighth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
25	Eighth light dimming	Green light, (0-255) linear dimming from dark to light
26	Eighth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
27	Ninth dimming	Red dimmer 0-255) linear dimming, from dark to bright
28	Ninth dimming	Green light, (0-255) linear dimming from dark to light
29	Ninth dimming	Blue dimmer 0-255) linear dimming, from dark to bright
30	Tenth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
31	Tenth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
32	Tenth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
33	11th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
34	11th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
35	11th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
36	The twelfth dimming	Red dimmer 0-255) linear dimming, from dark to bright
37	The twelfth dimming	Green dimmer 0-255) linear dimming, from dark to bright
38	The twelfth dimming	Blue dimmer 0-255) linear dimming, from dark to bright
39	Thirteenth light dimming	Red dimmer 0-255) linear dimming, from dark to bright

40	Thirteenth dimming	light	Green dimmer 0-255) linear dimming, from dark to bright
41	Thirteenth dimming	light	Blue dimmer 0-255) linear dimming, from dark to bright
42	Fourteen dimming	lamp	Red dimmer 0-255) linear dimming, from dark to bright
43	Fourteen dimming	lamp	Green dimmer 0-255) linear dimming, from dark to bright
44	Fourteen dimming	lamp	Blue dimmer 0-255) linear dimming, from dark to bright
45	15th light dimming		Red dimmer 0-255) linear dimming, from dark to bright
46	15th light dimming		Green dimmer 0-255) linear dimming, from dark to bright
47	15th light dimming		Blue dimmer 0-255) linear dimming, from dark to bright
48	Sixteenth dimming	light	Red dimmer 0-255) linear dimming, from dark to bright
49	Sixteenth dimming	light	Green dimmer 0-255) linear dimming, from dark to bright
50	Sixteenth dimming	light	Blue dimmer 0-255) linear dimming, from dark to bright
51	Seventeenth dimming	light	Red dimmer 0-255) linear dimming, from dark to bright
52	Seventeenth dimming	light	Green dimmer 0-255) linear dimming, from dark to bright
53	Seventeenth dimming	light	Blue dimmer 0-255) linear dimming, from dark to bright
54	Eighteenth dimming	light	Red dimmer 0-255) linear dimming, from dark to bright
55	Eighteenth dimming	light	Green dimmer 0-255) linear dimming, from dark to bright
56	Eighteenth dimming	light	Blue dimmer 0-255) linear dimming, from dark to bright
57	19th light dimming		Red dimmer 0-255) linear dimming, from dark to bright
58	19th light dimming		Green dimmer 0-255) linear dimming, from dark to bright
59	19th light dimming		Blue dimmer 0-255) linear dimming, from dark to bright
60	Twentieth dimming	light	Red dimmer 0-255) linear dimming, from dark to bright
61	Twentieth dimming	light	Green dimmer 0-255) linear dimming, from dark to bright
62	Twentieth dimming	light	Blue dimmer 0-255) linear dimming, from dark to bright
63	The twentieth dimmer	light	Red dimmer 0-255) linear dimming, from dark to bright
64	The twentieth dimmer	light	Green dimmer 0-255) linear dimming, from dark to bright
65	The twentieth dimmer	light	Blue dimmer 0-255) linear dimming, from dark to bright
66	Twenty - twelve lamp dimming		Red dimmer 0-255) linear dimming, from dark to bright
67	Twenty - twelve lamp dimming		Green dimmer 0-255) linear dimming, from dark to bright
68	Twenty - twelve		Blue dimmer 0-255) linear dimming, from dark to bright

	lamp dimming		
69	Twenty-three lights dimming		Red dimmer 0-255) linear dimming, from dark to bright
70	Twenty-three lights dimming		Green dimmer 0-255) linear dimming, from dark to bright
71	Twenty-three lights dimming		Blue dimmer 0-255) linear dimming, from dark to bright
72	Twenty-four lights dimming		Red dimmer 0-255) linear dimming, from dark to bright
73	Twenty-four lights dimming		Green dimmer 0-255) linear dimming, from dark to bright
74	Twenty-four lights dimming		Blue dimmer 0-255) linear dimming, from dark to bright
75	Twenty-fifth light dimming		Red dimmer 0-255) linear dimming, from dark to bright
76	Twenty-fifth light dimming		Green dimmer 0-255) linear dimming, from dark to bright
77	Twenty-fifth light dimming		Blue dimmer 0-255) linear dimming, from dark to bright
78	Twenty-sixth light dimming		Red dimmer 0-255) linear dimming, from dark to bright
79	Twenty-sixth light dimming		Green dimmer 0-255) linear dimming, from dark to bright
80	Twenty-sixth light dimming		Blue dimmer 0-255) linear dimming, from dark to bright
81	Twenty-seventh light dimming		Red dimmer 0-255) linear dimming, from dark to bright
82	Twenty-seventh light dimming		Green dimmer 0-255) linear dimming, from dark to bright
83	Twenty-seventh light dimming		Blue dimmer 0-255) linear dimming, from dark to bright
84	Twenty-eighth dimming		Red dimmer 0-255) linear dimming, from dark to bright
85	Twenty-eighth dimming		Green dimmer 0-255) linear dimming, from dark to bright
86	Twenty-eighth dimming		Blue dimmer 0-255) linear dimming, from dark to bright
87	Twenty-ninth dimming		Red dimmer 0-255) linear dimming, from dark to bright
88	Twenty-ninth dimming		Green dimmer 0-255) linear dimming, from dark to bright
89	Twenty-ninth dimming		Blue dimmer 0-255) linear dimming, from dark to bright
90	Thirtieth light dimming		Red dimmer 0-255) linear dimming, from dark to bright
91	Thirtieth light dimming		Green dimmer 0-255) linear dimming, from dark to bright
92	Thirtieth light dimming		Blue dimmer 0-255) linear dimming, from dark to bright
93	31th lights dimming		Red dimmer 0-255) linear dimming, from dark to bright
94	31th lights dimming		Green dimmer 0-255) linear dimming, from dark to bright
95	31th lights dimming		Blue dimmer 0-255) linear dimming, from dark to bright
96	Thirty-two lights		Red dimmer 0-255) linear dimming, from dark to bright

	dimming	
97	Thirty-two lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
98	Thirty-two lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
99	The thirty-third light dimmer	Red dimmer 0-255) linear dimming, from dark to bright
100	The thirty-third light dimmer	Green dimmer 0-255) linear dimming, from dark to bright
101	The thirty-third light dimmer	Blue dimmer 0-255) linear dimming, from dark to bright
102	Thirty-four lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
103	Thirty-four lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
104	Thirty-four lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
105	Thirty-five lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
106	Thirty-five lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
107	Thirty-five lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
108	Thirty - six lamp dimming	Red dimmer 0-255) linear dimming, from dark to bright
109	Thirty - six lamp dimming	Green dimmer 0-255) linear dimming, from dark to bright
110	Thirty - six lamp dimming	Blue dimmer 0-255) linear dimming, from dark to bright
111	Thirty-seven lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
112	Thirty-seven lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
113	Thirty-seven lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
114	38th light dimming	Red dimmer 0-255) linear dimming, from dark to bright
115	38th light dimming	Green dimmer 0-255) linear dimming, from dark to bright
116	38th light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
117	39th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
118	39th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
119	39th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
120	The fortieth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
121	The fortieth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
122	The fortieth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
123	41th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
124	41th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright

125	41th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
126	42th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
127	42th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
128	42th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
129	43th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
130	43th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
131	43th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
132	44th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
133	44th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
134	44th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
135	The forty-fifth light dimming	Red dimmer 0-255) linear dimming, from dark to bright
136	The forty-fifth light dimming	Green dimmer 0-255) linear dimming, from dark to bright
137	The forty-fifth light dimming	Blue dimmer 0-255) linear dimming, from dark to bright
138	46th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
139	46th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
140	46th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
141	47th lights dimming	Red dimmer 0-255) linear dimming, from dark to bright
142	47th lights dimming	Green dimmer 0-255) linear dimming, from dark to bright
143	47th lights dimming	Blue dimmer 0-255) linear dimming, from dark to bright
144	48th light dimmer	Red dimmer 0-255) linear dimming, from dark to bright
145	48th light dimmer	Green dimmer 0-255) linear dimming, from dark to bright
146	48th light dimmer	Blue dimmer 0-255) linear dimming, from dark to bright
147	colour mixture	A combination of colors.
148	kromprogramo	The first 146 channels enable 0-10 / 11-255) built-in programs.
149	Built-in program speed	0-255 up speed slow down 0 fastest speed.

**After the power on, the address code shows that the D001 LED is not bright; The signal line of the control station is plugged in and the power supply of the control station is connected. When the signal of the DMX512 controller is received, the address code displays A001, and the signal of the controlled station is controlled at this time.**

**In the address code state, if there is no access console after multimachine connection, it can realize the function of master slave online, operate one of the devices, and the rest of the devices in the address D001 state follow the host's synchronous running program. When connected to the console, the device in the address state can be controlled by the console.**



